

## MUNITIONS ADHESIVES & SEALANTS



**Permabond is a world leader in adhesive and sealant technologies, and a trusted supplier to high-reliability manufacturing industries worldwide.**

Permabond offers a range of products for the munitions manufacturing industry. We have a wealth of experience in providing custom formulations to suit specific munitions customer requirements.

A global team of technical, sales, and distribution professionals are specially trained to ensure they can assist you in selecting the most appropriate standard or custom formulated product for your unique application. Our team looks forward to hearing from you.




### KEY FEATURES & BENEFITS

#### **Anaerobic Adhesives and Sealants:**

- ▶ Better joint coverage for improved sealing consistency
- ▶ Low viscosity for easy application after the bullet is inserted
- ▶ UV fluorescent for inspection identification
- ▶ Reduced trajectory deflection

#### **Dual Cure Anaerobic-UV Sealants:**

- ▶ Instant Seal
- ▶ Easy to dispense
- ▶ Low viscosity for penetration between bullet and casing
- ▶ Cures anaerobically between bullet and casing
- ▶ Meniscus of 'fillet' can be cured with UV light - this gives additional durability and extra protection against moisture
- ▶ Fluoresces under UV black light for inspection purposes

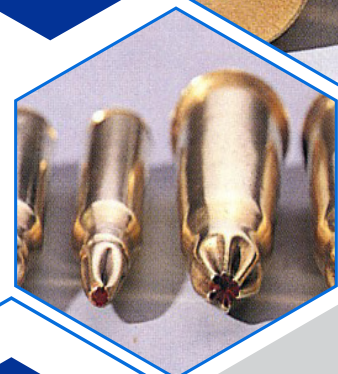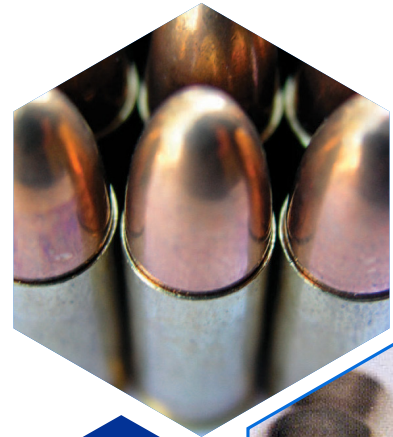

# Munitions Adhesives & Sealants

The table below lists Permabond adhesives and sealants that are commonly used for the listed applications. Depending on your application requirements a different Permabond solution may be more suitable to your needs. Please contact Permabond's technical team for support with your product selection.

Grade	A1024	A1062	UV7134
<b>Features</b>	Low viscosity wicking anaerobic sealant.	Dual cure bullet sealant. Secondary UV cure allows the curing of the excess meniscus around the top of the casing providing improved durability and a visible seal.	Dual cure, friable bullet sealant that seals crimps and primers. Secondary UV cure to lock out moisture while fully burning off during firing.
<b>Appearance</b>	Yellow	Red or Green	Green
<b>Typical Applications</b>	Sealing between bullet and casing	Sealing between bullet and casing	Sealing primers and crimps on bullets
<b>Cure Method</b>	Anaerobic cure	Anaerobic / UV cure	Anaerobic / UV cure
<b>Viscosity (mPa.s) cP</b>	10-20	10-20	2400
<b>Handling Time</b>	<5 minutes (copper) <20 minutes (steel)	<5 minutes (copper) <20 minutes (steel) 5 - 20 seconds (UV cure)	<30 mins (Anaerobic cure) <10 seconds (UV cure)
<b>UV Fluorescence</b>	Yes	Yes	Yes

## Benefits of Permabond over lacquer

- ▶ Solvent free - no emissions or waste, non-flammable, 100% reactive
- ▶ Single component - no mixing or pot-life
- ▶ Viscosity can be matched to application
- ▶ No creep, shrinkage, or cracking
- ▶ Excellent protection against moisture ingress

## Benefits of Permabond over bitumen-based sealants

- ▶ No heat-cure required
- ▶ No drying out or cracking
- ▶ Low viscosity for easy in-line dispensing
- ▶ Rapid cure
- ▶ Built in UV fluorescence enables easy inspection

[PERMABOND.COM](http://PERMABOND.COM)

*Authorised distributor stamp:*



[info.americas@permabond.com](mailto:info.americas@permabond.com) US 732 868 1372  
[info.europe@permabond.com](mailto:info.europe@permabond.com) UK +44 (0)1962 711661  
[info.asia@permabond.com](mailto:info.asia@permabond.com) Asia +86 21 5773 4913

The information given and the recommendations made herein are based on our experience and are believed to be accurate. No guarantee as to, or responsibility for, their accuracy can be given or accepted, however, and no statement herein is to be treated as a representation or warranty. In every case we urge and recommend that purchasers, before using any product, make their own tests to determine, to their own satisfaction, its suitability for their particular purposes under their own operating conditions. Always refer to current product technical datasheet for most recent and accurate technical information.